

HOW-TO-USE INSTRUCTIONS

Use the "Carpet Tractor II" by simply rolling it back and forth the length of the seam, applying pressure as needed. It can also be rolled across the seam, until the desired appearance is achieved.

You will learn through normal use that the required pressure, to produce best results, will vary somewhat with different kinds of carpeting and seaming methods.

It takes very little time and experience to become thoroughly proficient in its use. Even though you may be an expert mechanic, there will be times when conditions beyond your control will make the "Carpet Tractor II" the most valuable item in your tool box !!

DISTRIBUTED BY:

Introducing the...


No. 952

35-640-1

'Carpet Tractor II'™

MULTI-PURPOSE SEAMING TOOL

Made Especially for Plush, Cut Pile, Frieze and Twist Carpeting as Smooth Rollers Will Not Untwist Fibers. Eliminates Most Shading in Carpets of These Types.

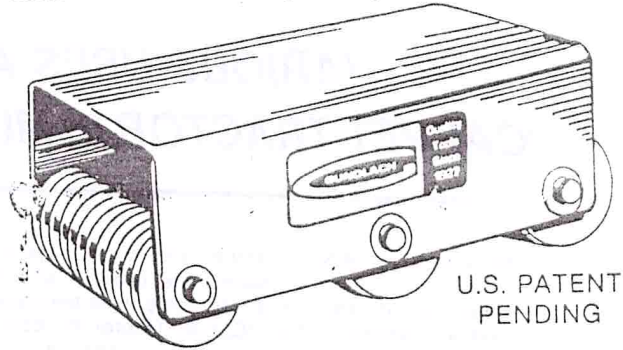

This amazing tool can obscure carpet seams — even badly cut seams — with much less time and effort than any other method! It can likewise vastly improve the appearance of poor seams caused by numerous other installation problems.

It works on all kinds of carpeting — In conjunction with all types of seaming and bonding methods, but made especially for cut pile carpet — for both floor and wall installations. See the following pages for more detailed information.



another fine tool from
BENO J. GUNDLACH CO.

P. O. BOX 544 • BELLEVILLE, ILLINOIS 62222

VARIOUS USES AND FEATURES OF THE 'CARPET TRACTOR II'™ MULTI-PURPOSE SEAMING TOOL...

DIRECT GLUE DOWN — Used extensively in large area installations. "Miles" of seams are needed, and the "double cutting" method is frequently used because it is fast and efficient. The "Carpet Tractor II" does a superior job of hiding such seams — even badly cut seams — with a minimum of time and effort. This assures job profitability and customer satisfaction.

Another problem sometimes encountered in this type of installation is a crease mark, bubble, or pucker in the carpet, that will not adhere to the subfloor — even if a heavy linoleum roller is used. The "Carpet Tractor II," because of its 3 rows of rollers, makes the carpet conform to subfloor irregularities.

This tool is especially valuable for use with cut pile carpet, since it works exceptionally well on this difficult-to-seam material.

POWER BOND — Performance is similar to the direct glue down method. When there is extreme difficulty in getting a power bond seam to adhere to the floor without "peaking," then the "Carpet Tractor II" can solve this problem, too.

HOT MELT TAPE SEAMING — Wavy seams can result from pressing the carpet into the tape with hands or other objects. When using the "Carpet Tractor II" by using no more pressure than is needed to bond the backing to the tape, this wavy or shady seam problem can be completely eliminated.

Another advantage of the "Carpet Tractor II" is that the rows of rollers are as wide as the hot melt tape. This reduces the number of needed "passes" — compared to narrower rollers. These rollers also help the adhesive to

better penetrate the carpet backing for a positive bond — without harm to the nap or indentations along the seam line.

REPAIR WORK — Customers hope for "like new" results and this can be provided with the "Carpet Tractor II." Cookie cutter plug areas, and repaired seams can be blended with highly satisfactory results. This is especially true for cut pile or plush type carpet.

WALL CARPET INSTALLATION — More opportunities for seaming problems exist here because of wavy plaster, high baseboard removal, etc. Here again the "Carpet Tractor II" does an excellent job of getting the carpet to adhere to irregular surfaces such as plush type wall coverings, velvets, etc. with vastly improved appearance.

TOOL CONSTRUCTION — Consists of 3 rows of special "smooth" rollers. These rollers, since they are staggered, have the unique ability to meld the carpet nap together. The rollers are 1 1/4" in diameter, the rows are spaced 1 1/4" apart, and are 3" wide. The rollers will last indefinitely, and the entire tool is zinc plated for rust prevention.

The body of the "Carpet Tractor II" conforms comfortably to the hand, and consequently it can be used for a long period of time without fatigue. Likewise, there is no handle to cause strain on the hand or the wrist. It easily fits into a tool box, as the overall dimensions are 6 1/2" long x 3" wide x 2 1/4" high. Weight is only 2 lbs.

See next page for instructions . . .