

GETTING STARTED


Your new Van Mark TrimCutter™ is designed for use on Mark Series Contractor, Commercial and Industrial model brakes. Read all instructions and safety information prior to using this tool.

IMPORTANT SAFETY NOTE:

- Always keep hands and fingers clear of the knives during all phases of use.
- If using both hands to push tool through material, ensure hands are not in the path of the exiting material as it leaves the rear area of the tool.
- Remove tool prior to bending material. Failure to do so can cause the tool to fall from brake resulting in tool damage or personal injury to user.
- Never use tool to cut material not firmly clamped in brake

OPERATION


- Measure material and place marks at opposite ends where cut is to be made. TrimCutter™ cuts 1 1/2 inches out from the stainless steel edge therefore align cut marks 1 1/2 inches away from stainless steel edge. With cut marks now aligned with tool knives, clamp material firmly in place sufficient enough to prevent shifting during cut.

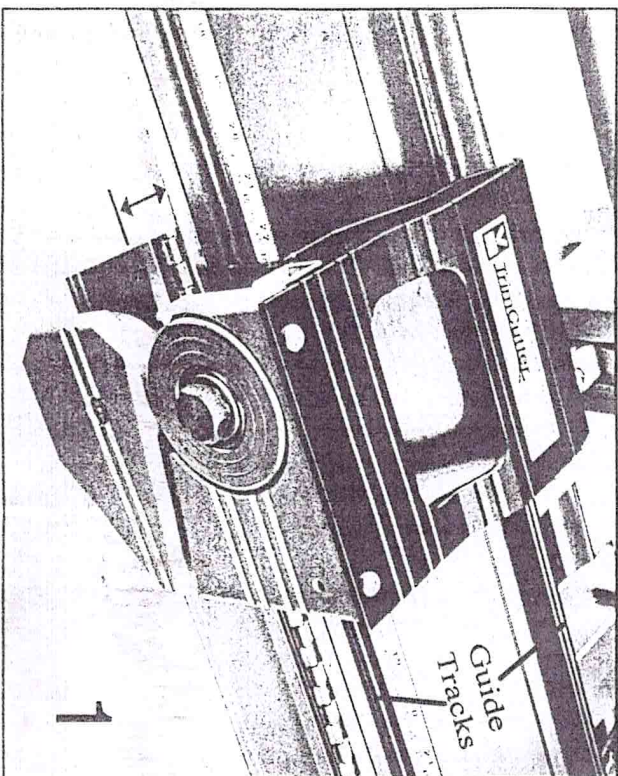


Measure cut line 1 1/2 inches from stainless steel edge.

OPERATION (cont.)

55-7111

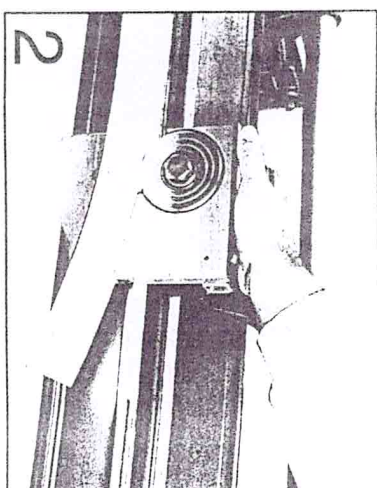




- As tool is extended along brake, cut material lowers to ground. Prior to making cuts, ensure ground contact will not mar or damage material. Remove tool from brake after cut and prior to bending. Store tool in safe dry area when not in use.

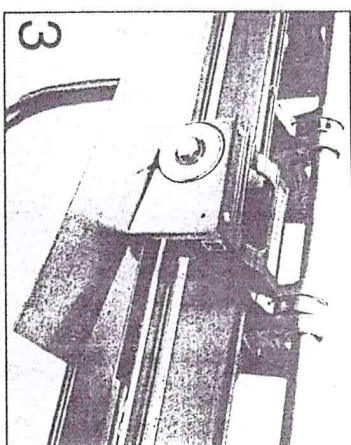

- While facing the brake, place tool onto guide tracks and to the right of clamped material. Ensure all 4 guide bearings are properly seated onto tracks and that tool rolls freely. Insert fingers into opening to grip tool and extend along entire piece.

Using TrimCutter™ with Coil Dispenser™

Score Guide

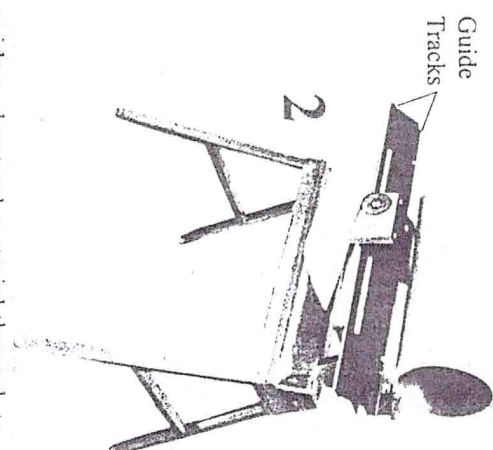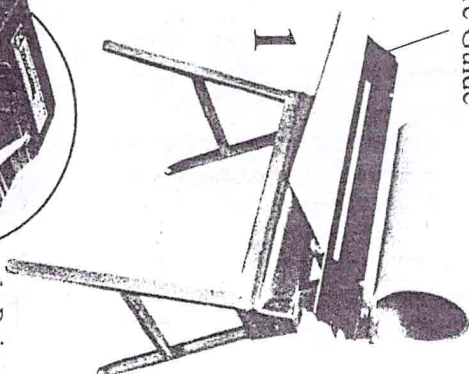

- Raise score guide and extend material through to desired length. Lower score guide against material.
- Place TrimCutter™ onto guide tracks. With one constant motion, extend TrimCutter™ along entire width of material using downward pressure on tool to keep material from shifting during cut. Remove tool when not in use.