


716

RIDGID No. 342 Internal Wrench

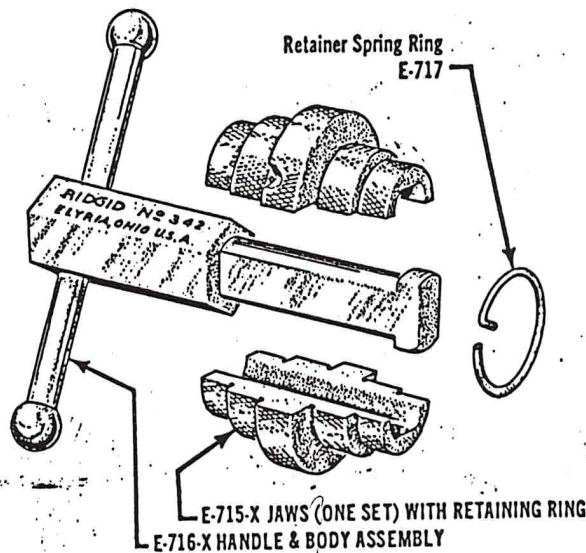


The Ridge Tool Company, Elyria, Ohio, U.S.A.


Printed in U.S.A.

Form No. IWI-367

To reverse position of jaws . . .

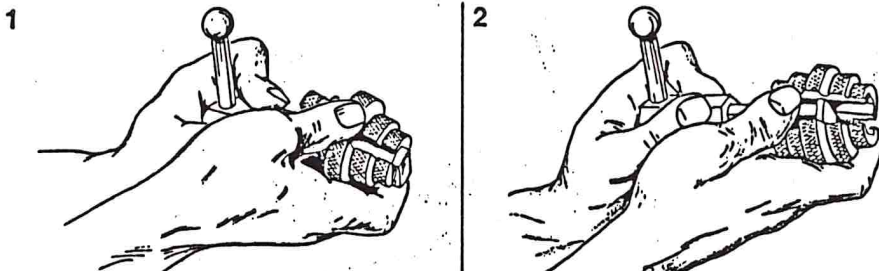

Spread jaws apart with thumb on side where ring is split. Slide jaws away from handle about 1/2 jaw length. It is not necessary to remove spring ring.

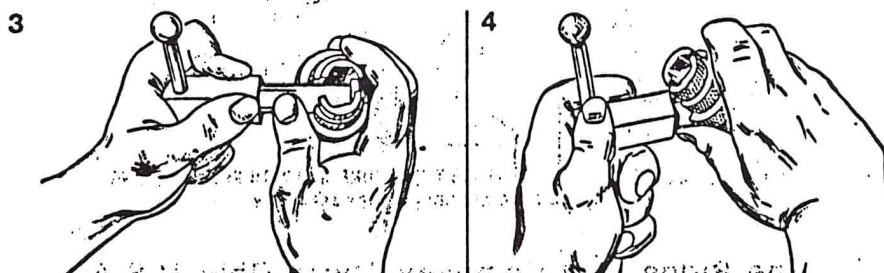

Maintain grip on jaws. Keep jaws in firm contact with body of wrench turning

Push jaws back against hex shoulder of body.

716